

BTRS1-UB1

Auto-Rinse™ - Underbar Bracket Bundle

Auto-Rinse™ Core Unit (BTRS-1) + Underbar Bracket (UB1)



WORK FAST. WORK CLEAN.

BTRS1-UB1 FEATURES:

- Stainless steel construction
- Allows Auto-Rinse™ to mount to underbar surface, bar die wall, or wall
- Quickly, thoroughly, and automatically rinses a pair of drink-making tools (mixing tins, mixing glasses, bubble tea shakers, milk-frothing pitchers, jiggers, measuring glasses, cocktail strainers, and more)
- Warm-water rinse quickly dissolves sugars and syrups
- Disassembles for easy cleaning - removable components fit on a standard commercial glass/dishwasher rack
- Does not require electricity
- Does not use chemicals
- NSF certified
- Patented

BTRS-1 TECHNICAL SPECIFICATIONS:

- Minimum water pressure requirement: 30 PSI
- Adjustable rinse cycle time
- Self-Metering Valve: 1/2" NPSM inlet
- Nozzles: solid-stream polypropylene
- Drain: 1-1/2" oversized drain
- Materials: 18 gauge stainless steel. All plumbing components meet federal lead-free requirements and NSF standards
- Can rinse items up to 8" tall and 3.8" diameter (standard 28 oz. mixing tins, standard cocktail mixing glasses)

UB1 FEATURES:

- Stainless steel construction
- 2 mounting options make retrofitting easy and convenient
 - Hang from underbar surface, or mount to die wall (see product notes below and diagrams on pg. 2 for more detail)
- Space-saving, economical alternative to using custom tables or equipment stands



Product Notes (see pg. 2 for detailed diagrams)

- **INSTALLATION OPTION A (see pg. 2):** Hanging from underbar surface with bracket flanges of UB1 allows top of BTRS-1 to be flush with spill rail. Minimum of 6" bar top overhand required. Minimum thickness of 3/4" plywood underbar surface recommended for hanging.
- **INSTALLATION OPTION B (see pg. 2):** Use UB1 to mount BTRS-1 to a wall or to bar die wall. Convenient for installations where underbar depth is less than 6", or when mounting to underbar surface is not preferred/possible.
- Paper templates for Installation Options A and B provided with Underbar Bracket (UB1).
- If mounting beneath bar top, shelving, or any obstruction more than 6" deep, allow minimum of 2" clearance above unit for removal of Top Cover.
- Allow minimum of 4" clearance on side of valve box for servicing.
- 1-1/2" drain line recommended. Bushing down to smaller sizes will accelerate clogging.
- BTRS-1 and UB1 may ship in separate cartons.

Omni-Rinse, LLC · 738 E. Dundee Road #197 · Palatine, IL 60074 · PH: 847-792-1177


OmniRinse.com · info@OmniRinse.com

specifications subject to change without notice


FORM ID: SS-BTRS1-UB1 REV 2023.07.30 1

BTRS1-UB1


AUTO-RINSE™ (BTRS-1) + UNDERBAR BRACKET (UB1)



FRONT ELEVATION




SIDE ELEVATION

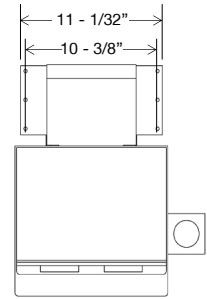

PLAN VIEW

INSTALLATION OPTION A

Keyholes on Bracket flanges allow Auto-Rinse™ to hang from underbar surface, so that unit can be mounted flush and level with spill rail

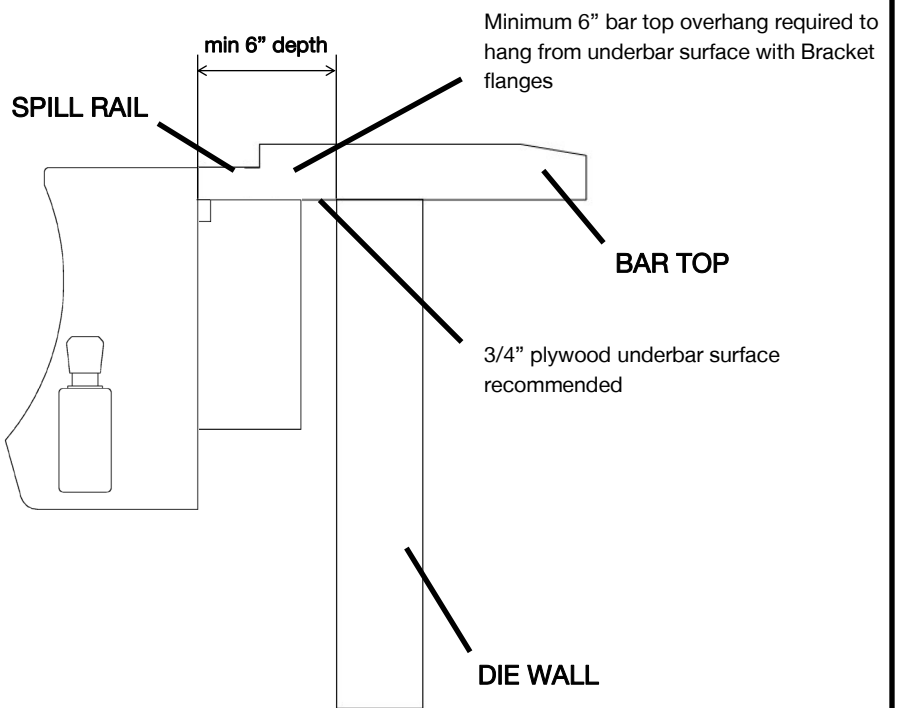

INSTALLATION OPTION B

When overhang is more than 6" (and hanging Auto-Rinse™ is not possible or preferred), allow 2" clearance above unit for removal of top cover

Keyholes on rear face of Bracket allow Auto-Rinse™ to be mounted to die wall. Convenient for installations where underbar depth is less than 6", or when mounting to underbar surface is not desired

